
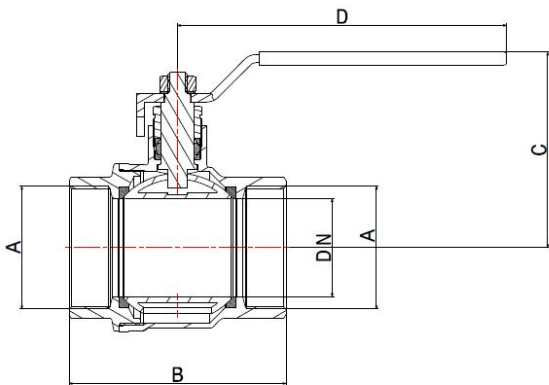
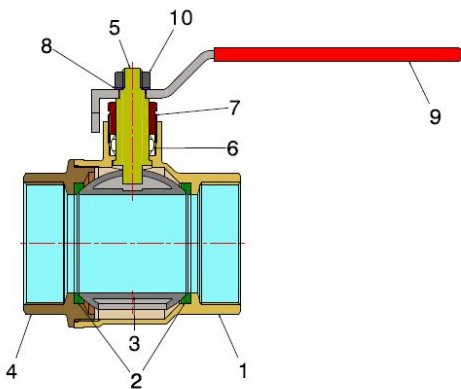


WATER BALL VALVES

MISSOURI FROM 2.1/2" TO 4" 795101

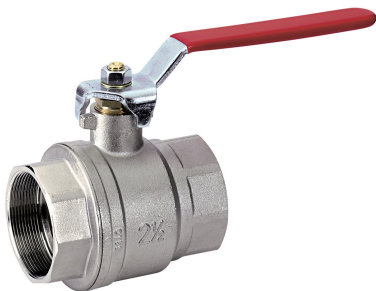

- F/F water ball valve with gland packing iron lever
- Thread ISO 228
- Temperature range min -10°C - max +95°C

Valve suitable for distributing and interrupting fluids that are generally non-corrosive, compatibly with the valve materials. Plumbing, heating, industrial and agricultural sectors are the ideal fields of application. It's a standard bore valve and the ball seal is guaranteed by two PTFE seats.

The operating mechanism seal features two PTFE sealing rings with adjustable gland, internally installed stem and anti-ejection system. It is advisable to carry out a complete maneuver cycle at least once every three months in order to prevent limescale deposits that could compromise the valve functioning.

COMPONENTS

POS.	PART NAME	N°	MATERIAL
1	Body	1	CW617N UNI-EN 12165 nickel-plated
2	Seal	2	PTFE
3	Ball	1	CW617N UNI-EN 12165 chrome-plated
4	End connection	1	CW617N UNI-EN 12165 nickel-plated
5	Stem	1	CW617N UNI-EN 12164
6	Gland packing	3	PTFE
7	Gland	1	CW614N UNI-EN 12164
8	Washer	1	CW508L UNI-EN 1652
9	Lever	1	Galvanised iron and PVC coated
10	Nut	1	Galvanised iron

DIMENSIONS

DN	A	B	C	D	PN
65	2.1/2"	132	108	200	20
80	3"	167	126	200	20
100	4"	200	159	280	20




PACKAGING

	2.1/2"	3"	4"
CODE	79510115	79510117	79510119
PCS BOX	-	-	-
PCS CARTON	10	5	2

GAS BALL VALVES

MISSOURI

795001

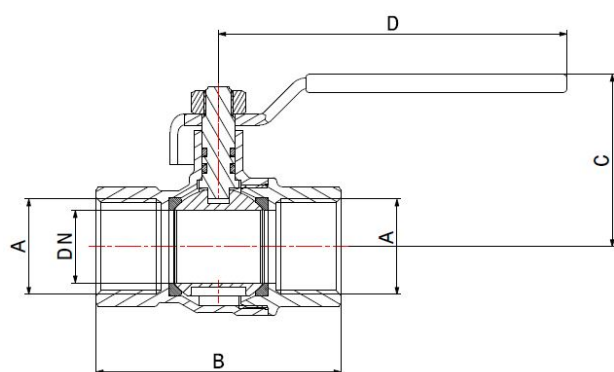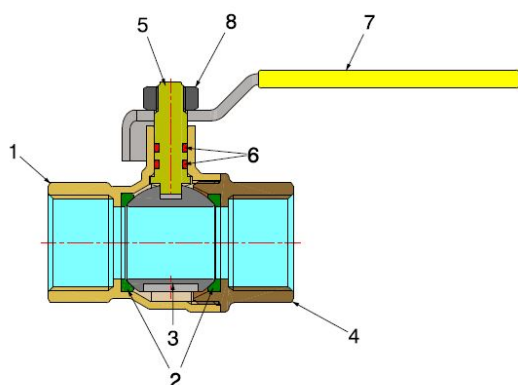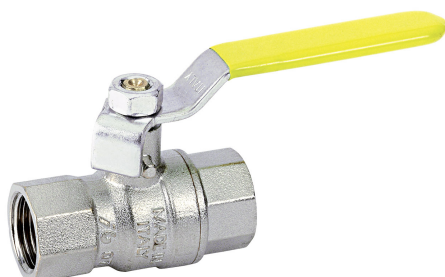

- F/F gas ball valve with iron lever
- Female thread EN 10226-1
- Pressure class MOP 5
- Temperature range min -20°C- max + 60°C

Valve produced according to EN331 standard class MOP5, suitable for distributing and interrupting low pressure gases. Plumbing and heating systems and industrial sector are the ideal fields of application. It's a full bore valve and the ball seal is guaranteed by two PTFE seats.

The operating mechanism seal features two VITON® O-Rings with an internally installed stem and anti-ejection system.

COMPONENTS

POS	PART NAME	N°	MATERIAL
1	Body	1	CW617N UNI-EN 12165 nickel-plated
2	Seal	2	Virgin PTFE
3	Ball	1	CW617N UNI-EN 12165 chrome-plated
4	End connection	1	CW617N UNI-EN 12165 nickel-plated
5	Stem	1	CW617N UNI-EN 12164
6	O-Ring	2	VITON®
7	Lever	1	Galvanised iron and PVC coated
8	Nut	1	Galvanised iron

DIMENSIONS

DN	A	B	C	D
15	Rp 1/2"	59	41	95
20	Rp 3/4"	68	46	95
25	Rp 1"	80	56	120
32	Rp 1.1/4"	96	63	120
40	Rp 1.1/2"	106	80	150
50	Rp 2"	130	88	150

PACKAGING

	Rp 1/2"	Rp 3/4"	Rp 1"	Rp 1.1/4"	Rp 1.1/2"	Rp 2"
CODE	79500104	79500106	79500108	79500110	79500111	79500113
PCS BOX	12	10	8	-	-	-
PCS CARTON	120	120	72	25	16	8