


Technical Specifications:

Electrical Specifications		Volt		230 V	
Pressure	Frequency	50 - 60 Hz			
	Working Pressure	7.5 Bar (0.75 Mpa)			
Temp.	Max. Setting Temp.	75° C			
	Thermal Safety Cut-Out Limit	99° C			
	Thermostat Safety Levels	Double Safety			
Basic Insulation		Class I			
Degree of Protection		IPX4			
Material	Boiler Material	Steel			
	Boiler Coating	Porcelain			
	Insulation	Polyurethane Foam			
	Inlet & Outlet Pipes	Stainless Steel			
	Upper & Lower Covers	Metal			
	External Coating	Epoxy/ Polyester			
	Heating Element	Copper			
		Capacity			
Weight	Net (kg)	40L	50L	80L	100L
		11	14	19.5	22.5
Heater Type	Gross (kg)	13	16	22.5	26
		Flange	Flange	Flange	Flange
Installation	Vertical	Flange	Flange	Flange	Flange
		Horizontal	Horizontal	Horizontal	Horizontal
Package Dimensions mm		490*465*515	490*465*590	490*465*795	490*465*940

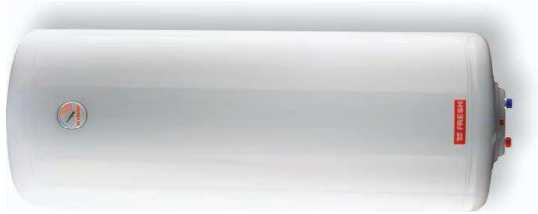

Features:

- Thick Insulation Ensures Lowest Electric Consumption
- Inner Enamel Coating Ensures Long Lifetime
- Oversized Magnesium Anode Provides the Most Protection Against Corrosion
- Electrostatic Polyester Outer Coating Provides Artistic Look & Ensures Protection
- CE Certified
- Analogue Thermometer Display


Specifications	Container Capacity	
	20 H.	40 H.
120 Lit	125	290
150 Lit	110	240
200 Lit	40	80

Capacity 120L, 150L, 200L


Technical Specifications:



Electrical Specifications	Volt	230 V
	Frequency	50 - 60 Hz
	Working Pressure	7.5 Bar (0.75 Mpa)
Pressure	Max. Setting Temp.	80° C
	Thermal Safety Cut-Out Limit	99° C
Temp.	Thermostat Safety Levels	Double Safety
	Class I	
Basic Insulation	IPX4	
	Degree of Protection	
Material	Boiler Material	Steel
	Boiler Coating	Porcelain
	Insulation	Polyurethane Foam
	Inlet & Outlet Pipes	Stainless Steel
	External Coating	Epoxy/ Polyester
	Heating Element	Copper
Weight	Capacity	
	Net (kg)	150L 200L
	Gross (kg)	47 56
Heater Type	Flange	59
	Vertical	Flange
Installation	Vertical	Vertical
	620*600*1113	620*600*1378
Package Dimensions mm		



Dimensions:

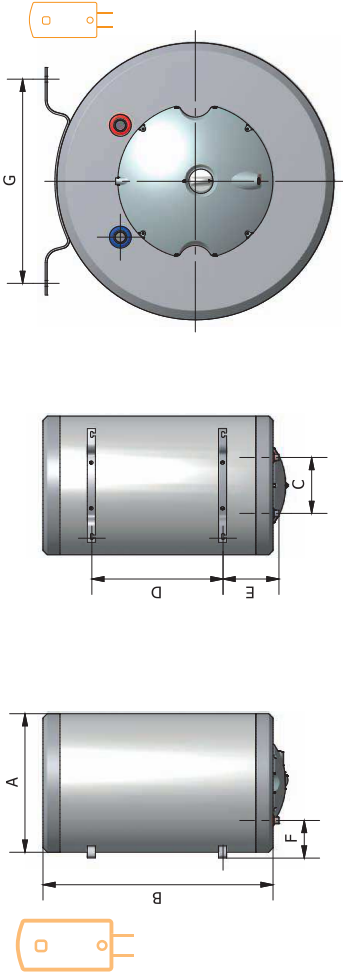

Model	Storage Capacity		Voltage (V)	Power (W)	Packing Dimensions (mm)	Shipping Weight		A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)
	Lit	U.S. Gals				Lbs	Kg							
Fresh 150	150	39.6258	230	2000	1113*600*620	21	47	570	947	230	540	230	154	240
Fresh 200	200	52.8344	230	2000	1378*600*620	25	56	570	1195	230	788	230	154	240

